

UNITEX® FARM FRESH

VEGETABLE OIL FORM RELEASE




BENEFITS:

- ◆ Organic
- ◆ Biodegradable
- ◆ No Petroleum
- ◆ Environmentally Friendly
- ◆ VOC Compliant
- ◆ Ready to Use
- ◆ Odorless
- ◆ Non-staining



NSF/ANSI 61
CERTIFIED

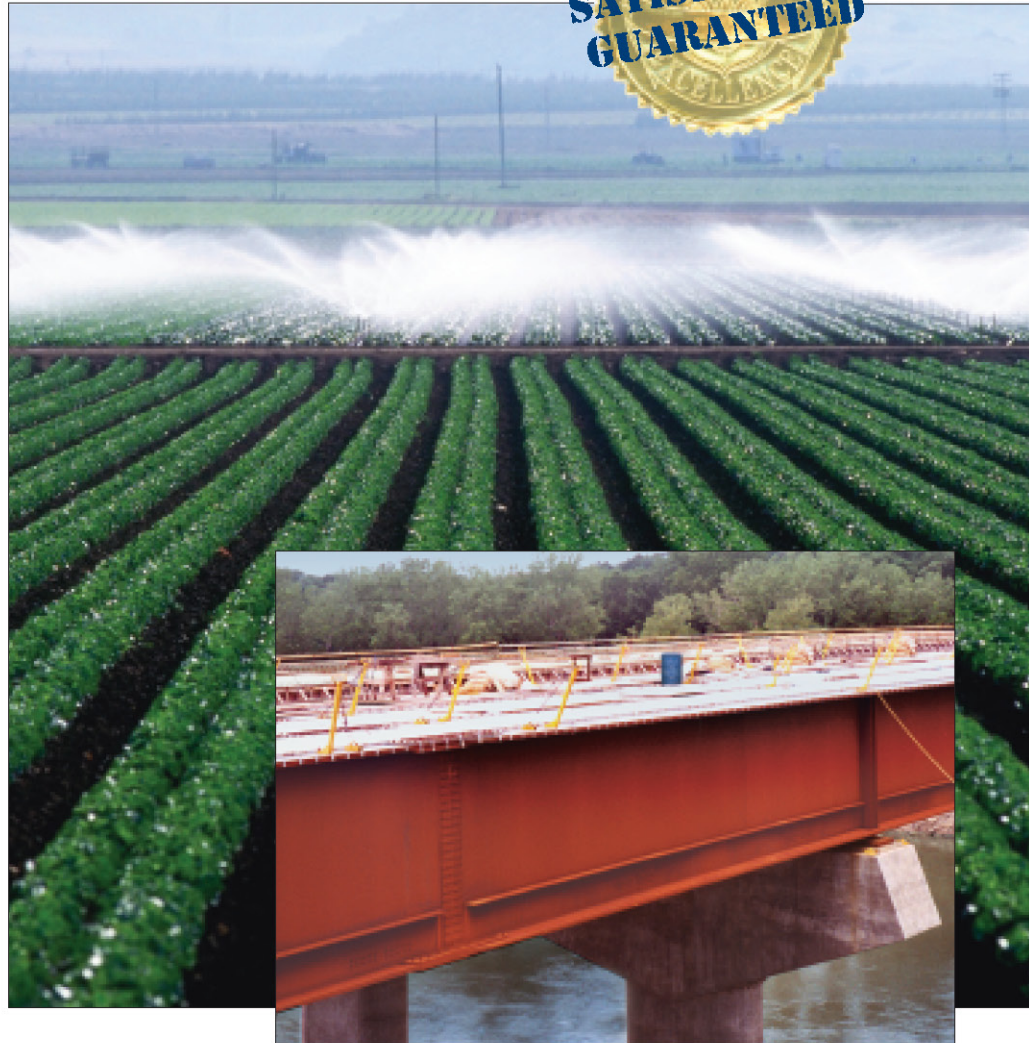

Innovative • Reliable • Guaranteed
FARM FRESH – the best form release
on the market!

FARM FRESH

VEGETABLE OIL FORM RELEASE

DESCRIPTION

Using the latest micro-emulsion technology, FARM FRESH is an innovative, 100% natural, organic chemical release agent. Ideal for sensitive environmental situations such as bridge formwork over rivers and streams or potable water reservoirs. FARM FRESH provides quick, easy release and leaves an architectural bondable concrete surface. 100% GUARANTEED SATISFACTION*.

USAGE

- Chemically releases concrete from plywood, steel, aluminum, polystyrene, and fiberglass forms and formliners.
- Prevents concrete build-up on all equipment.
- Cleans and reconditions forms.
- Helps eliminate build-up, bugholes, and fines.

APPLICATION

Stir before use. Apply in thin film for maximum protection and economy. Spread uniformly with cross spray to avoid pin holes and uncoated areas. Puddles should be wiped up with squeegee or rag prior to use of forms. Prior to coating plywood forms, apply one or two heavy brush coats to edges for waterproofing protection.

Surface Preparation:

Forms and equipment should be free from dirt, hardened concrete and foreign matter.

Method:

For best results, lightly fog FARM FRESH using Unitex Scotchman atomizing spray tip.

PACKAGING

5 gallon / 18.9 liter pails
55 gallon / 208 liter drums
275 gallon / 1,045 liter totes

COVERAGE

Steel, Aluminum, Plastic and High Density Plywood:
1000 - 1500 sq ft / gal
24.5 - 36.7 sq m / L

Medium Density Plywood, Paper Column Forms:

1000 - 1250 sq ft / gal
24.5 - 30.6 sq m / L

BB Grade Plywood:

1000 sq ft / gal
24.5 sq m / L

Rough Sawn Lumber, Straited Plywood:

First use, 2 coats: 500 sq ft / gal / coat
12 sq m / L / coat
Subsequent uses: 1000 sq ft / gal
24.5 sq m / L

CLEANUP

Sprayers and other application equipment can be cleaned with water.

COMPLIANCES

Corps of Engineers CEGS-03300, Section 10.8 Form Coating.
Navy Dock and Piers 56359
V.O.C. Compliant

LIMITATIONS

- For subsequent coatings over concrete, follow recommended application procedures by paint and coating manufacturers.
- When any material is to be applied on top of the concrete, follow the application instructions of the manufacturer.
- Protect from freezing.

Disclaimer of Warranties: Neither manufacturer nor seller have any knowledge or control concerning the purchaser's use of the product. No expressed warranty is made by manufacturer or seller with respect to the results of any use of the product or container that the product comes in. No implied warranties including, but not limited to, an implied warranty of merchantability or an implied warranty of fitness for a particular purpose are made with respect to the product. Neither manufacturer nor seller assume any liability for personal injury, loss or damage resulting from the use of the product. In the event that the product shall prove defective, buyer's exclusive remedy shall be as follows: Seller or manufacturer shall, upon request of buyer, replace any quantity of the product which is proven to be defective or shall, at its option, refund the purchase price of the product upon return of the product. Manufacturer shall not be responsible for use of this product in a manner to infringe on any patent held by others.

Contact UNITEX Technical Services for further information or installation instructions.

** We are so confident that you will think FARM FRESH is the best release agent you've ever used, we will fully refund your purchase price if you are not completely satisfied.*



Tested and certified against NSF/ANSI 61, Section 5



www.unitex-chemicals.com • email: mail@unitex-chemicals.com
3101 Gardner • Kansas City, MO 64120 • 816-231-7700 • 816-483-3149 Fax • 800-821-5846